

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 57-117333

(43)Date of publication of application : 21.07.1982

(51)Int.Cl.

B01J 8/24
B01J 35/08
// B01D 53/36

(21)Application number : 56-003816

(71)Applicant : GADELIUS KK

(22)Date of filing : 16.01.1981

(72)Inventor : OKAMOTO EIJI

FUKAYA YASUHIRO


YAMADA TAKATOSHI

(54) REACTION APPARATUS FLUIDIZED LAYER TYPE CATALYTIC GAS

(57)Abstract:

PURPOSE: To carry out gas-solid contact in good efficiency by using a catalyst with reduced pressure loss and a large specific surface area by fluidizing the catalyst with a particle size in a specific range on a porous plate and upto a specific height.

CONSTITUTION: In the fluidized layer type catalytic gas reaction apparatus, a granular catalyst 5 with a particle size of 0.2mmW2mm is held on a porous plate 3 and the layer of the catalyst 5 is fluidized by a gas stream 2 but the height of the formed fluidized layer is adjusted to 300mm or less. In this manner, because the catalyst with a large specific surface area and reduced pressure loss is used and the height of the fluidized layer is low gas-solid reaction efficiency is high, even if the amount of the catalyst to be used is small.

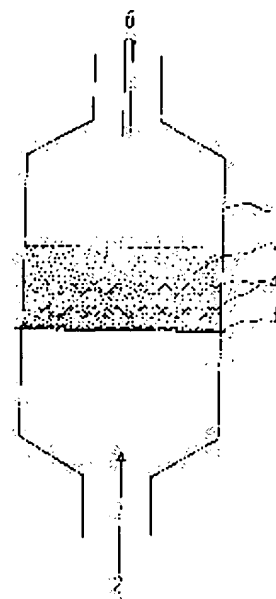

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the
examiner's decision of rejection or application
converted registration]

[Date of final disposal for application]

[Patent number]

BEST AVAILABLE COPY

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]